



H15312K60 15 HP TWO-STAGE



High Pressure Two-Stage Pump

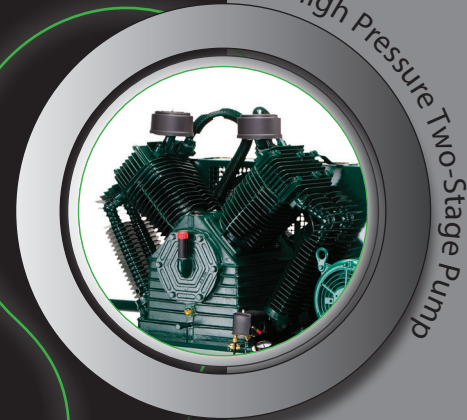

Heavy-Duty Shut-Off Valve

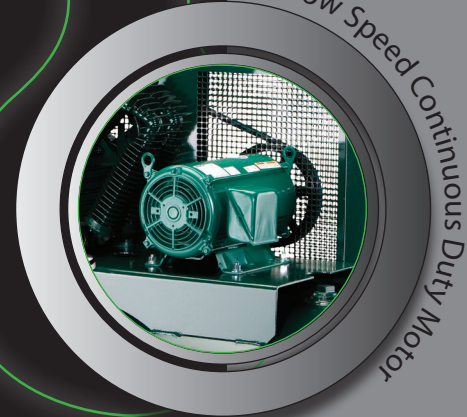

Low Speed Continuous Duty Motor

SPECIFICATIONS

HORSEPOWER	15 HP
MOTOR RPM	1800
VOLTAGE	230/460
CFM DELIVERED @ 175 PSI	46.2 CFM
CFM DISPLACED	58.4 CFM
TANK CAPACITY	120 GALLONS (ASME)
FACTORY SETTINGS	145-175 PSI
PUMP-UP / RECOVERY TIME	4:08 / :36
SHIPPING WEIGHT	984 LB
DIMENSIONS (LxWxH)	72"x30"x54"
PHASE	THREE
THERMAL PROTECTION	Magnetic Starter
AMP DRAW (RUNNING)	37.8
DUTY CYCLE %	100%