




7722HK28

270 cc Portable Gas

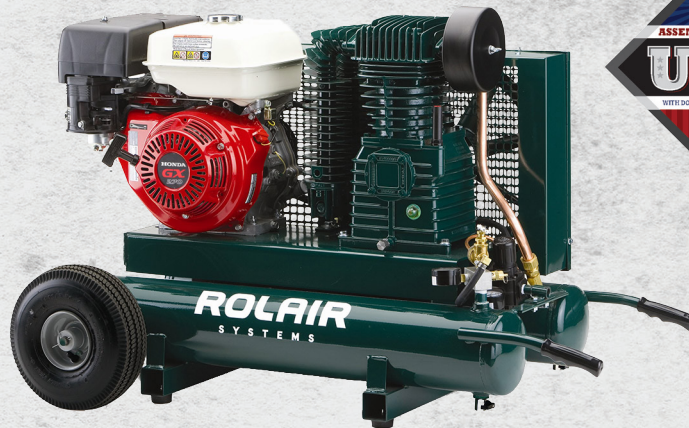

Model 7722HK28 utilizes a powerful two-stage pump to deliver 17.0 CFM @ 90 PSI - enough to keep up with large contracting crews. This model incorporates the popular 270 cc (GX270) Honda engine with automatic idle-down, for increased fuel efficiency, and an atmospheric unloading system to prevent oil consumption.

SPECIFICATIONS

ENGINE DISPLACEMENT	270 cc
ENGINE RPM	3200-1960
CFM DELIVERED @ 90 PSI	17 CFM
CFM DISPLACED	20.3 CFM
TANK CAPACITY	9 GALLONS
FACTORY SETTINGS	120-150 PSI
PUMP-UP / RECOVERY TIME	:53 / :08
SHIPPING WEIGHT	285 LB
DIMENSIONS (LxWxH)	46"x28"x30"
PUMP OIL CAPACITY	61 OZ.
PUMP STAGES	2

Honda GX270 Engine



**Floating Saddle
Decreases Vibration**



Ball Valve Tank Drain



FEATURES

STANDARD


- FOAM-FILLED, FLAT-FREE TIRE
- TOTALLY ENCLOSED STEEL BELT GUARD
- AUTOMATIC ENGINE IDLE CONTROL
- SCHMIDT BELT TENSIONING DEVICE
- COLD START VALVE

OPTIONAL

- IN-LINE FILTER
- REGULATOR
- LUBRICATOR
- 20-GALLON ASME TANK
- ELECTRIC START

SHIPPING DIMENSIONS

Weight	Length	Width	Height
285 lb.	47 in.	28 in.	36 in.

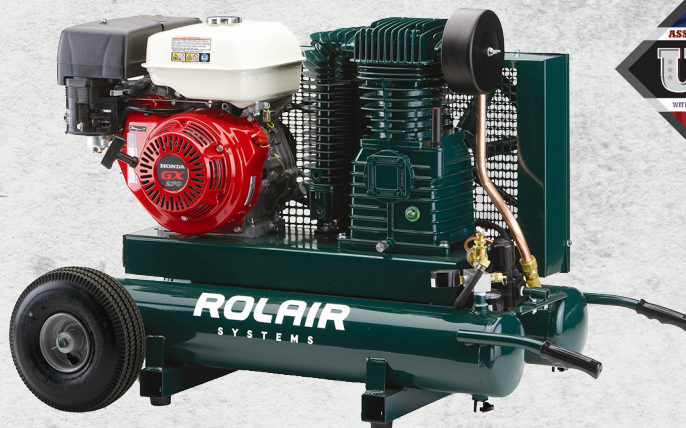

Adecuado para cuadrillas grandes de contratistas, el 7722HK28 utiliza una potente bomba de dos etapas para entregar 17 ft³/min (28.9 m³/h) a 90 PSI (6.2 bar). Este modelo incorpora el popular motor Honda de 270 cm³ (GX270) con control automático de ralentí para ofrecer una mayor eficiencia de uso de combustible, y un sistema de descarga atmosférica para evitar el consumo de aceite.

SPECIFICATIONS

DESPLAZAMIENTO DEL MOTOR	270 cc
R.P.M. DEL MOTOR	3200-1960
SALIDA DE PIES ³ A 90 PSI	17 CFM
DESPLAZAMIENTO EN PIES ³ /MIN	20.3 CFM
CAPACIDAD DEL TANQUE	34 LITERS
VALORES DE FÁBRICA	120-150 PSI
TIEMPO DE BOMBEO A PRESIÓN OPERATIVA/TIEMPO DE RECUPERACIÓN	:53 / :08
PESO DE ENVÍO	129.3 KG
DIMENSIONES (LARGO x ANCHO x ALTURA)	117 cm x 71 cm x 76 cm
CAPACIDAD DE ACEITE DE LA BOMBA	1.8 LITERS
ETAPAS DE LA BOMBA	2

Motor Honda GX270



El soporte flotante reduce la vibración



Llave de paso para drenaje de la válvula



FEATURES

STANDARD

- NEUMÁTICO RELLENO CON ESPUMA, QUE NO SE DESINFLA
- GUARDA CORREA DE ACERO TOTALMENTE ENCERRADO
- MARCHA AL RALENTI AUTOMÁTICA EN EL MOTOR
- DISPOSITIVO DE ADJUSTE DE CORREA SCHMIDT
- VÁLVULA DE ARRANQUE EN FRÍO

OPTIONAL

- FILTRO EN LÍNEA
- REGULADOR
- LUBRICADOR
- TANQUE ASME DE 75.7 LITROS (20 GALONES)
- ARRANQUE ELÉCTRICO

DIMENSIONES DE ENVÍO

Peso	Largo	Ancho	Altura
129.3 Kg	119.4 cm	71 cm	91.5 cm